

2 A183EP



Europäisches Patentamt

(19)

Eur pean Patent Office

Office ur péen d s brevets



(11)

EP 0 997 751 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
03.05.2000 Bulletin 2000/18

(51) Int. Cl.⁷: G02B 6/293, G02B 5/20,
H04B 10/18, H04L 25/03

(21) Application number: 99308189.2

(22) Date of filing: 18.10.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

- Lenz, Gadi
Fanwood, New Jersey 07023 (US)
- Madsen, Christi Kay
South Plainfield, New Jersey 07080 (US)
- Scotti, Ronald Edward
White House Station, New Jersey 08889 (US)

(30) Priority: 30.10.1998 US 182980

(71) Applicant:
LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636 (US)

(74) Representative:
Johnston, Kenneth Graham et al
Lucent Technologies (UK) Ltd,
5 Mornington Road
Woodford Green Essex, IG8 OTU (GB)


(72) Inventors:
• Kazarinov, Rudolf Feodor
Bethlehem, Pennsylvania 18017 (US)

(54) All-pass optical filter

(57) An all-pass optical filter which reduces the dispersion of optical pulses transmitted therethrough is disclosed. The all-pass optical filter reduces the dispersion of optical pulses by applying a desired phase response to optical pulses transmitted therethrough. The all-pass

optical filter also has a frequency independent amplitude response. The all-pass optical filter has a structure which includes at least one feedback path, a splitter/combiner, an input port, and an output port.

FIG. 4 A

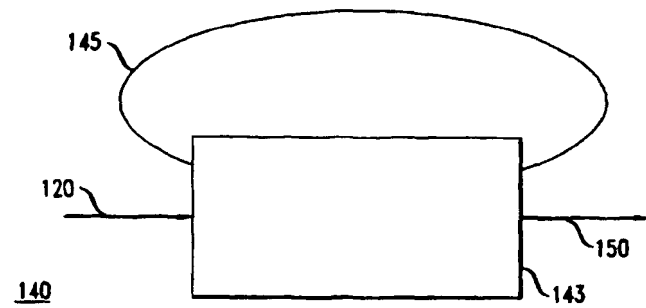

EP 0 997 751 A2

Description

1. Field of the Invention

5 [0001] The present invention relates generally to optical communication systems, and more particularly, to optical filters.

2. Description of the Related Art

10 [0002] Optical communication systems typically include a variety of devices (e. g., light sources, photodetectors, switches, optical fibers, modulators, amplifiers, and filters). For example, in the optical communication system 1 shown in FIG. 1, a light source 2 generates an optical signal 3. The optical signal 3 comprises a series of light pulses. The light pulses are transmitted from the light source 2 to a detector 5. Typically, an optical fiber 4 transmits the light pulses from the light source 2 to the detector 5. The optical fiber 4 has amplifiers (not shown) and filters (not shown) positioned
15 along its length. The amplifiers and filters propagate the light pulses along the length of the optical fiber 4 from the light source 2 to the detector 5.

[0003] Optical communication systems are useful for transmitting optical signals over long distances at high speeds. For example, optical signals are routinely transmitted distances greater than about 60 kilometers at transmission speeds exceeding 1 Gbit/s (Gigabit/second).

20 [0004] As shown on the graph of FIG. 2A, an optical pulse 10 typically comprises a packet of waves, wherein each wave in the packet, denoted as 15, is within a frequency bandwidth of Δf . Additionally, each wave 15 in the packet is characterized by a plurality of different frequencies as well as a plurality of different amplitudes. An optical device or component (e. g., amplifiers, filters, and fibers) has an amplitude response and a phase response. The amplitude response describes the attenuation of each frequency in the optical pulse after transmission through the optical device relative to their attenuation before transmission through the optical device. The phase response determines the time delay, denoted as 17, for each frequency 15 in the packet of waves.
25

[0005] Many optical devices or components used for transmitting optical pulses apply a nonlinear phase response to the optical pulse. The nonlinear phase response changes the separation time between each frequency 15 of the packet of waves, causing each frequency 15 to be delayed for a different length of time. When each frequency 15 of the packet of waves is delayed for a different length of time, the optical pulse 10 output from such device or component is broadened and/or distorted, as shown on the graph of
30

FIG. 2B. Broadening the optical pulse is undesirable because, depending on the time between optical pulses, the leading and trailing edges of the broadened pulse, denoted as 25, potentially interfere with the trailing edge of a previous optical pulse or the leading edge of a subsequent optical pulse, causing transmission errors. Devices or components in optical communication systems which broaden optical pulses are termed dispersive devices.
35

[0006] The dispersion of optical signals caused by the dispersive devices can be reduced with a dispersion compensating element. The term dispersion as used in this disclosure refers to the first and higher order derivatives of the group delay that are applied to the optical signal. The term group delay refers to the slope of the phase response at each frequency in the packet of waves. The dispersion compensating element applies a second dispersion to the optical signal which is the negative of the dispersion that was caused by the dispersive device. The second dispersion is additive with the dispersion applied by the dispersive device, so the net dispersion of the optical signal is about zero.
40

[0007] Dispersion compensating fibers and chirped fiber Bragg gratings are examples of fiber dispersion compensating elements. However, dispersion compensating fibers are lossy (~5-10 dB). Lossy fibers are undesirable because they potentially reduce the optical power of signals transmitted along their length. Many chirped fiber Bragg gratings typically only compensate for quadratic dispersion, limiting their utility to systems with quadratic dispersion. Also, chirped fiber Bragg gratings require a circulator for separating dispersion compensated optical signals from non-compensated optical signals. Additionally, chirped fiber Bragg gratings are long devices, making them expensive to integrate into optical communication systems.
45

[0008] Another dispersion compensating element, a dispersion equalizer, is described in Takiguchi, et al., "Variable Group-Delay Dispersion Equalizer Using Lattice-Form Programmable Optical Filter on Planar Lightwave Circuit", IEEE J. of Quant. Elect., Vol. 2, No. 2, June 1996, pp. 270-276. The Takiguchi et al. dispersion equalizer is a filter which includes $i + 1$ symmetrical Mach-Zehnder interferometers (MZIs) interleaved with i asymmetrical MZIs, where i is an integer. The term "symmetrical" as used in this disclosure means that the lengths of the two waveguide arms of the MZIs are the same, while the term "asymmetrical" means that the lengths of the two waveguide arms are different. While the Takiguchi et al. dispersion equalizers compensate for dispersion, the amplitude and phase responses are not independent. The result is that a frequency-dependent loss, introduced by the filter, potentially reduces the useable pass-band width of the filter. Additionally, the Takiguchi et al. dispersion equalizer is expensive and difficult to fabricate since a large number of symmetrical MZIs and asymmetrical MZIs are needed for dispersion compensation.
50
55

[0009] Moslehi et al. (U. S. Patent 4,768,850) also describes a dispersion compensating filter. The dispersion compensating filter is a cascaded fiber optic lattice filter. The cascaded fiber optic filter uses a cascade of recursive and non-recursive fiber optic lattice filters to compensate for dispersion. However, the single-stage cascaded fiber optic lattice filters of Moslehi et al. are lossy (~20 dB). Since the Moslehi et al. devices are lossy, signal amplification is required for providing optical signals having adequate signal strengths for transmission along the optical fiber.

[0010] Dilwali, S. et al., "Pulse Response of a Fiber Dispersion Equalizing Scheme Based on an Optical Resonator", *IEEE Photon. Tech. Lett.*, Vol. 4, No. 8, pp 942-944 (1992) proposes the use of a single-stage fiber ring structure as a dispersion equalizer in optical fibers. However, dispersion compensation using a single stage fiber ring structure affects the useable pass-band of the filter, reducing it.

[0011] Li, K. D. et al., "Broadband Cubic-Phase Compensation with Resonant Gires-Tournois Interferometers", *Optics Lett.*, Vol. 14, No. 9, pp 450-452 (May 1989) discloses the use of Gires-Tournois interferometers (GTIs) for the dispersion compensation of ultrashort laser pulses. Each GTI includes two reflectors which are separated one from the other by a fixed distance. One reflector has a reflectivity of 100 % and the other reflector has a reflectivity less than 100 %. However, the GTI arrangement only provides moderate dispersion compensation to the ultrashort laser pulses, limiting the ability for transmitting optical signals at high bit rates.

[0012] Additionally, optical filters which apply time delays are useful for synchronizing bit streams of optical signals. For example, optical communication systems utilizing time division multiplexed (TDM) techniques (see Hall, K. L. et al., "All-Optical Storage of a 1.25 kbit Packet at 10 Gb/s", *IEEE Photon. Tech. Lett.*, Vol. 7, No. 9, pp. 1093-1095 (September 1995), require the synchronization of bit streams of optical signals to delay the propagation of some optical signals in time.

Summary of the Invention

[0013] The present invention is directed to an all-pass optical filter. The all-pass optical filter reduces the dispersion of optical pulses transmitted therethrough. The all-pass optical filter reduces the dispersion of optical pulses by applying a desired phase response to optical pulses transmitted therethrough.

[0014] The desired phase response applies a frequency-dependent time delay to each frequency of each wave in the packet of waves contained in the optical pulse. Application of the frequency-dependent time delay to each frequency of each wave in the packet of waves contained in the optical pulse causes the total group delay of pulses transmitted through the all-pass optical filter to approximate a constant value. When the total group delay approximates a constant value, the dispersion of the optical pulse (first and higher order derivatives of the group delay) reduces to about zero.

[0015] The all-pass optical filter of the present invention also has a frequency independent amplitude response. That is, the amplitude of each frequency of the optical pulse transmitted through the all-pass optical filter is substantially preserved.

[0016] The all-pass optical filter of the present invention has a structure which includes at least one feedback path, a splitter/combiner, an input port, and an output port. The splitter/combiner is coupled to at least one of the feedback paths, the input port, and the output port. The splitter/combiner determines what portion of an input optical pulse is provided to the at least one feedback paths. Thereafter, the at least one feedback path applies the desired phase response to the optical pulses transmitted through the all-pass optical filter.

[0017] Each of the at least one feedback paths forms a loop having a path length. The path lengths of each feedback path are optionally different. Feedback paths with different path lengths are desirable because they potentially increase the free spectral range (FSR) of the all-pass optical filter. The term FSR as used in this disclosure refers to the period over which the phase response of the optical pulse repeats.

[0018] In one embodiment of the present invention, the feedback path of the all-pass optical filter has a ring resonator structure. The ring resonator structure includes one or more ring resonators where each of the ring resonators is a closed loop. The one or more ring resonators are optionally arranged as a ring cascade or as a series of coupled rings. The ring cascade couples a first ring resonator with a splitter/combiner and then the remaining ring resonators are coupled one to another. For the series of coupled rings, each ring is independently coupled to a splitter/combiner.

[0019] In an alternate embodiment of the present invention, the at least one feedback path of the all-pass optical filter includes a cavity and a plurality of reflectors. At least one reflector of the plurality of reflectors has a reflectivity of about 100 %, while the remaining reflectors are partial reflectors with reflectivities less than 100 %. Twice the length of the cavity determines the path length of the feedback path. The partial reflectors perform the functions of the splitter/combiner.

[0020] Another embodiment of the present invention uses a photonic band gap (PBG) structure as the feedback path of the all-pass optical filter. The photonic band gap (PBG) structure includes periodic layers of a material which confine a range of frequencies within such periodic layers. Defects formed in a 2-dimensional array of such layers (2-D PBG) provides a guided feedback path for optical pulses propagated therein. Point defects optionally formed at the edges of the 2-D PBG structure perform the functions of the splitter/combiner, coupling optical signals into and away

from such feedback path.

[0021] A plurality of all-pass optical filters of the present invention are suited for use in an optical communication system. The plurality of all-pass optical filters are optionally arranged as a concatenated series.

[0022] The all-pass optical filter of the present invention is optionally suitable for delaying the transmission of optical pulses in time. The all-pass optical filter delays the transmission of optical signals by lengthening the time for optical pulses to be transmitted therethrough.

[0023] Other objects and features of the present invention will become apparent from the following detailed description considered in conjunction with the accompanying drawings. It is to be understood, however, that the drawings are designed solely for purposes of illustration and do not serve to limit the invention, for which reference should be made to the appended claims.

Brief Description of the Drawings

[0024]

FIG. 1 shows an optical communication system including a light source, an optical filter, and a detector;

FIG. 2A is a graph of an optical pulse comprising a packet of frequencies, wherein each frequency in the packet is within a frequency bandwidth of Δf ;

FIG. 2B shows a graph of the optical pulse of FIG. 2A after its propagation through a dispersive device;

FIG. 3 shows an optical communication system including an all-pass optical filter of the present invention;

FIG. 4A shows an embodiment of the all-pass optical filter of the present invention including at least one feedback path, an input port, and an output port;

FIG. 4B shows an alternate embodiment of the all-pass optical filter of FIG. 4A including a plurality of feedback paths wherein one or more of the plurality of feedback paths includes an all-pass optical filter

FIG. 5 is a plot showing the frequency dependent time delay applied by the feedback path of the all-pass optical filter to the packet of frequencies contained in the optical pulse;

FIG. 6A illustrates an embodiment of the all-pass optical filter of the present invention wherein the feedback path includes a series of coupled rings;

FIG. 6B illustrates an embodiment of the all-pass optical filter of the present invention wherein the feedback path has a ring cascade structure;

FIG. 7A illustrates an embodiment of the all-pass optical filter of the present invention wherein the feedback path combines a cavity with a plurality of reflectors, wherein at least one reflector has a reflectivity of about 100 %;

FIG. 7B illustrates an embodiment of the all-pass optical filter of the present invention wherein the feedback path includes a plurality of cavities and a plurality of reflectors;

FIG. 8 illustrates an embodiment of the all-pass optical filter of the present invention wherein the feedback path includes a photonic band gap (PBG) structure;

FIG. 9A illustrates an embodiment of the all-pass optical filter of the present invention wherein the feedback path has a Mach-Zehnder Interferometer structure with waveguide arms having different lengths;

FIG. 9B illustrates an embodiment of the all-pass optical filter of the present invention wherein the feedback path has a Mach-Zehnder Interferometer structure with crossed waveguide arms that have about the same lengths;

FIG. 10A is a graph showing the group delay of an elliptical bandpass filter and an all-pass filter plotted as a function of the normalized frequency;

FIG. 10B is a graph showing the dispersion of a Gaussian pulse after it has been transmitted through the elliptical bandpass filter of Example 1;

FIG. 10C is a graph of the Gaussian pulse of FIG. 10B after it has been transmitted through an all-pass optical filter of the present invention;

FIG. 11 shows a graph of the time delay applied to an optical pulse by the 4th order all-pass optical filter described in Example 2; and

FIG. 12 is a graph which shows the dispersion correction applied to the wavelengths of the WDM system described in Example 3.

Detail Description

[0025] The present invention is directed to an all-pass optical filter. The all-pass optical filter is optionally included in an optical communication system 100. As shown in FIG. 3, optical communication system 100 includes an optical fiber 115 and an all-pass optical filter 130. Optical communication system 100 optionally includes a variety of devices (not shown) such as light sources, photodetectors, switches, modulators, amplifiers, and filters. The optical fiber 115 is coupled with the all-pass optical filter 130. An optical pulse 120 is transmitted in optical communication system 100. The

optical pulse 120 contains a packet of frequencies. Each frequency of the packet of frequencies has an amplitude.

[0026] The optical pulse 120 transmitted in optical communication system 100 is input into the all-pass optical filter 130. The all-pass optical filter 130 reduces the dispersion of the optical pulses transmitted therethrough. The all-pass optical filter 130 reduces the dispersion of optical pulses by applying a desired phase response to optical pulses transmitted therethrough.

[0027] The desired phase response applies a frequency-dependent time delay to each frequency of each wave in the packet of waves contained in the optical pulse. Application of the frequency-dependent time delay to each frequency of each wave in the packet of waves contained in the optical pulse causes the total group delay of pulses transmitted through the all-pass optical filter to approximate a constant value. When the total group delay approximates a constant value, the dispersion of the optical pulse (first and higher order derivatives of the group delay) reduces to about zero.

[0028] The all-pass optical filter 130 of the present invention also has a frequency independent amplitude response. That is, the amplitude of each frequency of the optical pulse transmitted through the all-pass optical filter is substantially preserved.

[0029] As shown in FIG. 4A, the all-pass optical filter 130 includes at least one feedback path 145, a splitter/combiner 143, an input port 140, and an output port 150. The splitter/combiner 143 is coupled with at least one feedback path 145, the input port 140, and the output port 150. The splitter/combiner 143 couples portions of the input optical pulse into and away from the feedback path 145.

[0030] When an optical pulse 120 enters the all-pass optical filter, a portion of the optical pulse is provided to the feedback path 145. The portion of the optical pulse provided to the feedback path 145, circulates repeatedly therein. However, at each pass of the optical pulse in the feedback path 145, some portion thereof is provided through the splitter/combiner 143 to the output port 150. Providing some portion of the optical pulse circulating in the feedback path 145 through the splitter/combiner 143 to the output port 150, incrementally reduces the portion of the optical pulse introduced into the feedback path 145, in effect removing it therefrom.

[0031] Coupling ratios for the splitter/combiner 143 and the feedback path 145 determine the portions of the optical pulse 120 that are coupled into and away from the feedback path 145. The magnitude of the coupling ratios for the splitter/combiner 143 and the feedback path 145 are a matter of design choice.

[0032] The length of the feedback path 145 is typically much shorter (about one order of magnitude) than the optical pulse length. Thus, as the input optical pulse 120 circulates repeatedly along the feedback path 145, it interferes with itself. That is, the leading edge portions of the optical signal circulating in the feedback path interfere with the trailing edge portions of the optical signal being input thereto. Interference between the leading and trailing edges of the optical pulse applies the frequency dependent time delay to each frequency contained therein.

[0033] An alternate embodiment of the all-pass optical filter of FIG. 4A including a plurality of feedback paths is shown in FIG. 4B. In FIG. 4B one or more of the plurality of feedback paths may include at least one all-pass optical filter 100. When an all-pass optical filter is included in a feedback path, the all-pass optical filter 100 applies a frequency dependent time delay to the portions of the optical signal circulating in the feedback path 145 independent from any frequency dependent time delay applied by the feedback path 145.

[0034] FIG. 5 is a graph of the group delay of an all-pass optical filter having one feedback path. In FIG. 5, the normalized frequency, $(f_1 - f_0)/\text{free spectral range (FSR)}$, is plotted as a function of the time delay.

[0035] Frequencies in the packet of frequencies of the optical pulse that fit an integer number of wavelengths on the feedback path are termed resonant frequencies and have a normalized frequency equal to zero, denoted as 170 on the graph of FIG. 5. The maximum time delays are applied to the resonant frequencies 170. Frequencies that do not fit an integer number of wavelengths on the feedback path are termed off-resonant frequencies. Time delays less than the maximum time delays are applied to the off-resonant frequencies. For example, frequencies that are resonant frequencies 170 have a time delay of about 20 au (arbitrary units) applied thereto, while off-resonant frequencies located at a point A on the graph of FIG. 5, denoted as 175, with a normalized frequency of about -0.05 have a time delay of about 2.5 au applied thereto.

[0036] After the frequency dependent time delays are applied to each frequency of the optical pulse, the optical pulse is output from the all-pass optical filter through the output port 150.

[0037] In one embodiment of the present invention, the at least one feedback path of the all-pass optical filter has a ring resonator structure, as shown in FIGS. 6A-6B. The ring resonator structure includes one or more ring resonators 180 wherein each of the ring resonators is a closed loop. The one or more ring resonators are optionally arranged as a ring cascade or as a series of coupled rings.

[0038] FIG. 6A depicts a structure with a series of coupled rings 175, wherein a first ring resonator 181 is coupled with the splitter/combiner 178 and then the remaining ring resonators 180 are coupled one to another. For the series of coupled ring resonators 175, the feedback path has a length which includes the length of each of the ring resonators 180, 181. Filter parameters such as the coupling coefficients, κ , for each ring, denoted as κ_1 , κ_2 , and κ_3 , as well as the phase, ϕ , of each ring resonator, denoted ϕ_1 , ϕ_2 , and ϕ_3 , are also shown. The coupling coefficients and the phase of the ring resonators are determined based on the free spectral range (FSR) of the filter.

[0039] FIG. 6B shows the ring cascade structure, wherein each ring resonator 180 is independently coupled to a splitter/combiner 178. For the ring cascade structure, the feedback path has a length which includes the length of each of the ring resonators 180.

[0040] In an alternate embodiment of the present invention, the at least one feedback path of the all-pass optical filter includes at least one cavity 205 and a plurality of reflectors 210, as shown in FIG. 7A. At least one of the plurality of reflectors 210 has a reflectivity of about 100 %, while the remaining reflectors are partial reflectors with reflectivities less than 100 %. Twice the length of the cavity 205 determines the path length of the feedback path. The partial reflectors perform the functions of the splitter/combiner.

[0041] Multiple feedback paths are optionally formed by combining a plurality of reflectors 210 and a plurality of cavities 205, as shown in the coupled cavity structure 200 of FIG. 7B. The coupled cavity structure 200 includes at least two arms 203. Each arm 203 contains a plurality of cavities 205 and a plurality of reflectors 210. The two or more arms of the coupled cavity structure provide separate paths for the input optical pulse and the reflected optical pulse. For example, as shown in FIG. 7B, input path 206 is separate from output path 212.

[0042] Another embodiment of the present invention uses a photonic band gap (PBG) structure 220 as the feedback path of the all-pass optical filter, as shown in FIG. 8. FIG. 8 is a top view of the photonic band gap structure 220. The photonic band gap (PBG) structure includes periodic layers of a dielectric material which confine a range of frequencies within such periodic layers (not shown). Defects formed in a 2-dimensional array of such dielectric layers (2-D PBG) provides a guided feedback path 225 along which optical pulses are transmitted. Point defects (not shown) optionally formed at the edges of the 2-D PBG structure perform the functions of the splitter/combiner, coupling optical signals into and out of the feedback path.

[0043] The frequency-dependent time delay applied to the packet of frequencies contained in the optical pulse can be determined mathematically from the transfer function of the all-pass optical filter. For example, when the transfer function of the all-pass optical filter is:

$$H(z) = \frac{\prod_{i=1}^N (z_i - z^{-1})}{\prod_{i=1}^N (1 - z_i z^{-1})} \quad (1)$$

evaluated at $z = e^{j2\pi f/FSR}$ wherein f is the optical frequency, and the normalized frequency is $f_N = f/FSR$. The splitter/combiner design sets the values for z_k , wherein $z_k < 1$. From equation (1), the all-pass optical filter has an amplitude response of $|H(f)| = 1$. Such an amplitude response for the all-pass optical filter means that all frequencies in the packet of frequencies pass through the filter without a change in their amplitudes. The phase response $\phi(f)$ of the all-pass filter is

$$\phi(f) = \tan^{-1} \left[\frac{\text{Im}\{H(f)\}}{\text{Re}\{H(f)\}} \right] \quad (2)$$

wherein the frequency dependent time delay is determined from

$$\tau(f) = -\frac{1}{2\pi} \frac{d\phi}{df} \quad (3)$$

[0044] Typically, the time delay for the input optical pulse $[\tau_i(f)]$ is combined with the time delay applied by the all-pass optical filter $(\tau_{AP}(f))$ so the time delay for the output optical pulse $\tau_o(f)$ is expressed as

$$\tau_o(f) = \tau_i(f) + \tau_{AP}(f) \approx \text{constant} \quad (4)$$

The dispersion is proportional to $\frac{d\tau}{df}$, so when the time delay of the output optical pulse, $\tau_o(f)$, approximates a constant

value, the dispersion of the optical pulse is expressed as

$$\frac{d\tau_o}{df} \approx 0 \quad (5)$$

[0045] Based on the dispersion of the input optical pulses determined from equation (4), the all-pass filter is designed. Filter parameters such as the number of stages (feedback paths), feedback path lengths, and splitter/combiner coupling ratios which best approximate

$$-\tau_1(f) + \text{constant} \quad (6)$$

are used to design the all-pass optical filter. An optimization routine may be used to obtain design values which minimize a given error condition.

[0046] For example, in the Nth order all-pass optical filter having a ring resonator structure, the coupling ratios and the pole locations for each ring are calculated from the transfer function

$$H(z) = e^{j\phi} (\rho e^{-j\phi} - z^{-1} / 1 - \rho e^{j\phi} z^{-1}) \quad (7)$$

wherein the coupler path amplitude transmission is designated by $\rho = \sqrt{1 - \kappa}$, where κ is the coupling ratio of the ring resonator, and ϕ is a phase associated with one feedback path. The free spectral range (FSR) is given by $\text{FSR} = c / (n_o 2\pi R)$, where R is the ring radius, and n_o is the effective index of the fundamental mode.

[0047] From equation (7), to produce a pole at z_n , for the structure shown in FIG. 6B, requires a coupling ratio of $\kappa_n = 1 - |z_n|^2$ a phase response of $\phi_n = \arg(z_n)$. The rings are nominally the same circumference with an incremental length or index change added to each ring to realize the phase response, e.g.

$$\phi_n = \frac{2\pi \Delta n l}{\lambda}$$

or

$$\phi_n = \frac{2\pi n \Delta l}{\lambda}$$

Heaters 185, having a length, l , are optionally deposited on a section of the ring to locally change the incremental length and create the desired phase, as shown in FIG 6B.

[0048] Another embodiment of the all-pass optical filter of the present invention forms the feedback path from a Mach-Zehnder Interferometer (MZI) as shown in FIGS. 9A and 9B. The MZI structure shown in FIG. 9A has more than one coupler, denoted as 308. In the MZI structure 300, a phase shifter 305 is optionally used to tune the coupling of optical pulses into and out of the feedback path, providing a tunable all-pass optical filter. The couplers 308 are optionally identical. The MZI structures shown in FIGS. 9A - 9B, are folded to minimize any increase in the feedback path length. In Fig. 9A, the MZI path lengths of waveguide arms 303, 304 are slightly different, but the difference is much smaller than the feedback path length. The slightly different feedback path length provides flexibility for designing wavelength dependent feedback coupling. Multiport MZIs, i.e. with greater than 2 arms, could also be used to further control the wavelength dependent feedback coupling.

[0049] In Fig. 9B, the path lengths of each arm 303, 304 are made substantially identical by crossing the waveguide arms. For such a structure, optical signal loss is reduced by increasing the crossing angle for the waveguide arms. Crossing the waveguide arms is desirable for large feedback coupling because the effective κ can be made large without affecting fabrication tolerances.

[0050] The all-pass optical filters of the present invention are suited for use in optical communication systems. For example, all-pass optical filters are suitable for use in optical communication systems which include multiplexers and/or demultiplexers. Coupling one or more all-pass optical filters to the front end of the multiplexer, reduces the dispersion of optical signals that are to be multiplexed. Conversely, coupling one or more all-pass optical filters to the back end of the demultiplexer, reduces the dispersion of optical signals after they are demultiplexed. In such systems, the one or more all-pass optical filters are optionally arranged as a concatenated series.

[0051] All-pass optical filters are also suitable for use in optical communication systems which include a gain equalizer filter (GEF). For example, coupling an all-pass optical filter to the front end of a gain equalizer filter optionally increases or decreases the amplitude of optical signals transmitted therethrough. Such an amplitude correction is important when transmitting optical signals between optical communication systems having different amplitude responses.

[0052] Optical systems such as WDM systems typically include multiple channels having multiple wavelengths (frequencies). In some WDM systems it is desirable to reduce the dispersion of each channel, separately. For example, many optical fibers have a dispersion slope around $+0.08 \text{ ps/nm}^2\text{-km}$. This means that the dispersion applied by the optical fiber to each channel is different. The problem is that even though the dispersion may be compensated perfectly at one wavelength, other wavelengths will have nonzero dispersion due to this dispersion slope. An all-pass filter can be designed to compensate the optical fiber's dispersion slope. For such an all-pass optical filter, the coupling ratios or partial reflectance values are varied gradually as a function of wavelength.

[0053] The all-pass optical filter of the present invention is optionally suitable for delaying the transmission of optical pulses in time. The all-pass optical filter delays the transmission of optical signals by lengthening the time delay of optical pulses transmitted therethrough.

[0054] The following examples are provided to illustrate a specific embodiment of the present invention.

Example 1

[0055] An optical communication system includes an elliptical bandpass filter. The optical system is a WDM system with a channel spacing of about 100 GHz, a per channel bit rate of about 8 Gb/s, and a passband width of about 11 GHz. The elliptical bandpass filter has an amplitude response, denoted as 400 in FIG. 10A, as well as approximately parabolic group delay across the pass band, denoted as 405. FIG. 10B shows the effects of dispersion on a Gaussian pulse 415 after it has been transmitted through the elliptical bandpass filter.

[0056] A ring resonator structure is desired for the feedback path of the all-pass optical filter. The phase function for the elliptical bandpass filter and the all-pass optical filter are then determined as

$$\tau_{BP}(f) + \tau_{AP}(f) \approx \text{constant.} \quad (8)$$

[0057] Based on the group delay for the input optical signals, the number of stages for the all-pass optical filter are determined. For this example, assume 4 stages. The all-pass optical filter's group delay response depends on its pole locations. Both a magnitude and a phase must be specified for each pole. The pole locations are determined from $H(z)$ (see equation 1). An initial choice for the pole locations is made to start the optimization process. The pole locations are then varied to minimize an error criterion. The following error criterion was used

$$E = \sum_{k=1}^N |\tau_{AP}(f_k) + \tau_{BP}(f_k) - \tau_{AP}(f_c) - \tau_{BP}(f_c)|^2 \quad (9)$$

where the passband is sampled at N points, f_k , and f_c is the frequency at the center of the passband. (See also, Madsen, C. et al. "Optical All-Pass Filters for Phase Response Design with Applications for Dispersion Compensation", IEEE Phot. Technol. Lett., vol. 10, no. 7, pp. 994-996, July (1998) and also Madsen, C. et al., "A General Planar Waveguide Autoregressive Optical Filter", J. Light. Technol., vol. 14, no. 3, pp. 437-447, March (1996), which are hereby incorporated by reference).

[0058] The resulting filter parameters for the all-pass optical filter are given in TABLE 1. The filter parameters for both the coupled ring structure (κ_L, ϕ_L) and the coupled cavity structure ($|p_L|, \phi_L + \pi + \angle p_L$) are listed. In TABLE 1, κ is the coupling ratio of the rings, ϕ is the phase of the rings or cavities, and ρ is the partial reflectance of the reflectors. TABLE 1 also includes the filter parameters for the cascade ring structure (κ_c, ϕ_c) and the cavity structure ($|p_c|, \phi_c + \pi + \angle p_c$). The phases, ϕ , are given in radians.

TABLE 1

Coupled			Cascade		
κ_L	$ p_L $	ϕ_L	κ_c	$ p_c $	ϕ_c
0.0000	1.0000	0.0000	0.2079	0.9027	-0.0732
0.0133	0.9933	0.0000	0.2079	0.9027	0.0732
0.0284	0.9857	0.0000	0.1910	0.8923	0.2258
0.0848	0.9567	0.0000	0.1910	0.8923	-0.2258
0.5894	0.6408				

[0059] The all-pass optical filter has a group delay characteristic, denoted as 408 in FIG. 10A. When the Gaussian pulse having a pulse characteristic described by 415 is transmitted through the all-pass optical filter with the parameters described above, the dispersion of the resulting optical pulse 425, is reduced as shown in FIG. 10C.

Example 2

[0060] All-pass optical filters are also useful for delaying an optical pulse in time. A 4th order all-pass filter is chosen to approximate a delay time of 16 au (arbitrary units) over the normalized frequency range of 0.4 to 0.6. The filter parameters for a cascade structure using either rings (κ, ϕ) or cavities ($\rho, \phi + \pi + \angle \rho$) are shown in TABLE 2.

TABLE 2

$ \rho $	κ	ϕ
0.8169	0.3326	2.7278
0.7721	0.4039	3.0009
0.8169	0.3326	-2.7278
0.7721	0.4039	-3.0009

The time delay for an all-pass optical filter with the parameters described above is shown in FIG. 11. The group delay applied to frequencies within the passband is essentially constant and much larger than the group delay applied to frequencies outside the passband.

Example 3

[0061] An all-pass filter described below compensates for the dispersion slope of an optical fiber. The all-pass optical filter is designed to compensate the dispersion slope of 250 km of fiber over a 40 nm range. The difference in dispersion at 1525 nm and 1565 nm is designed to be 800 ps/nm, with the longest wavelength having the most negative dispersion. The FSR is chosen to be an integer multiple of the system channel spacing. For this example a value of 25 GHz is selected. The bandwidth over which the dispersion approximates a constant value is about 5 GHz. The all-pass optical filter parameters (phase, partial reflectors or couplers) are optimized at several wavelengths over the 40 nm range for the specific dispersion required at each wavelength. A set of filter parameters (one for each wavelength) are determined. The parameters are shown in TABLE 3 for a cavity structure. The phase values, ϕ , of the all-pass optical filter were constrained to be constant to simplify fabrication requirements. For the reflector design the cavity phase is given by $\phi + \pi + \angle \rho$.

TABLE 3

	WAVELENGTH				
	1525	1535	1545	1555	1565
$ \rho_1 $	0.000	0.005	0.067	0.132	0.175
$ \rho_2 $	0.031	0.098	0.117	0.143	0.202
$ \rho_3 $	0.096	0.207	0.247	0.280	0.299
ϕ_1	-1.992	-1.992	-1.992	-1.992	-1.992
ϕ_2	-1.534	-1.534	-1.534	-1.534	-1.534
ϕ_3	2.981	2.981	2.981	2.981	2.981

[0062] The resulting dispersion correction for each wavelength is shown on the graph of FIG. 12. For wavelengths near 1565 nm, the dispersion is about -1000ps/nm. For wavelengths near 1525 nm, the dispersion is about -200 ps/nm. Thus, the all-pass optical filter compensates for the dispersion slope of the fiber.

Claims

1. An all-pass optical filter comprising:

5 an input port;
 an output port;
 a splitter/combiner; and
 at least one feedback path, wherein the all-pass optical filter is configured to apply a desired phase response
 10 to an optical pulse input to the all-pass optical filter, wherein the input optical pulse has a packet of frequencies,
 each frequency having an amplitude, and wherein the all-pass optical filter is further configured to substantially
 preserve the amplitude of each frequency of the optical pulse transmitted through the all-pass optical filter.

2. A method of reducing the dispersion of optical pulses comprising the steps of:

15 inputting an optical pulse into an all-pass optical filter, wherein the all-pass optical filter includes an input port,
 an output port, a splitter/combiner, and at least one feedback path, and wherein the input optical pulse contains
 a packet of frequencies, each frequency having an amplitude;
 applying a desired phase response to the optical pulse input to the all-pass optical; and
 20 transmitting the optical pulse out of the all-pass optical filter, wherein the amplitude of each frequency of the
 optical pulse transmitted through the all-pass optical filter is substantially preserved.

3. The filter of claim 1, or the method of claim 2, wherein the at least one feedback path of the all-pass optical filter
 comprises at least one ring resonator, and/or the at least one feedback path comprises a plurality of ring resonators
 25 arranged as a ring cascade, or the at least one feedback path comprises a plurality of ring resonators arranged as
 a series of coupled rings, or the at least one feedback path of the all-pass optical filter comprises one or more cav-
 ities and a plurality of reflectors, and wherein one reflector of the plurality of reflectors has a reflectivity of about
 100%.

4. The filter of claim 3, or the method of claim 2, wherein one or more reflectors in the plurality of reflectors is a partial
 30 reflector.

5. The filter of claim 1 or the method of claim 2, wherein the at least one feedback path of the all-pass optical filter
 comprises a photonic band gap (PBG) structure.

35 6. The filter of claim 1, or the method of claim 2, wherein the photonic band gap structure includes a plurality of peri-
 odic layers of a dielectric material for confining the packet of frequencies of the optical pulse.

7. An optical communication system comprising one or more all-pass optical filters, wherein the one or more all-pass
 optical filters include:

40 an input port;
 an output port;
 a splitter/combiner; and
 at least one feedback path, wherein the all-pass optical filter is configured to apply a desired phase response
 45 to an optical pulse input to the all-pass optical filter, wherein the input optical pulse has a packet of frequencies,
 each frequency having an amplitude, and wherein the all-pass optical filter is further configured to substantially
 preserve the amplitude of each frequency of the optical pulse transmitted through the all-pass optical filter.

50 8. The optical communication system of claim 7, wherein the all-pass optical filters are arranged as a concatenated
 series.

FIG. 1

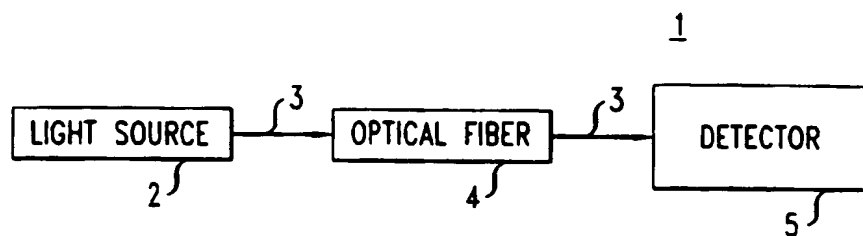


FIG. 2A

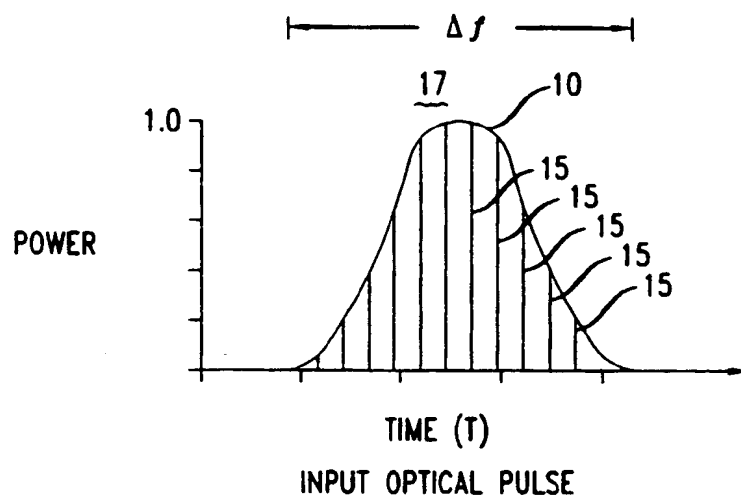


FIG. 2B

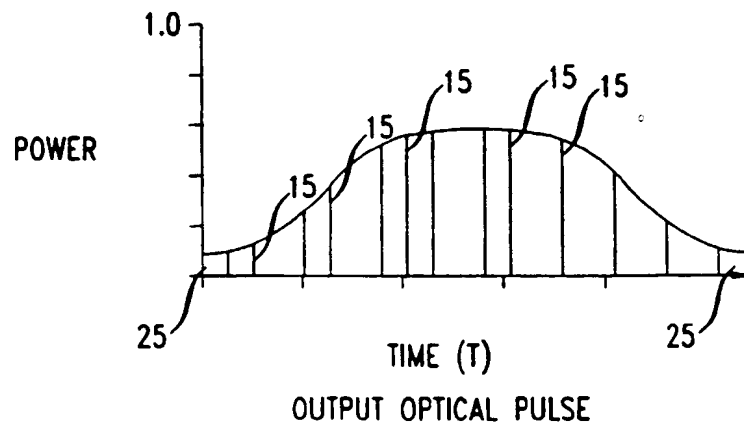


FIG. 3

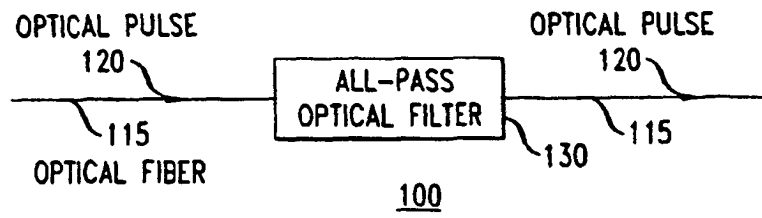


FIG. 4 A

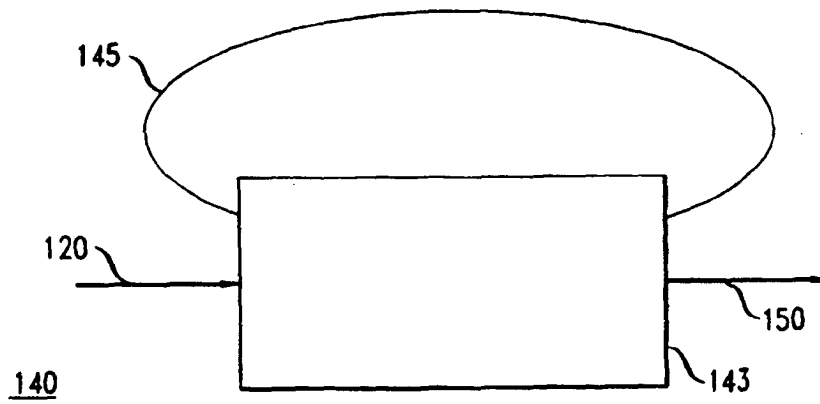


FIG. 4 B

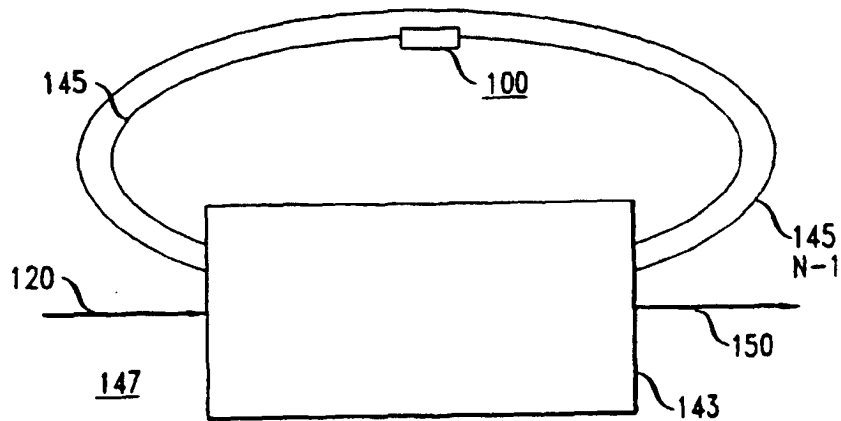


FIG. 5

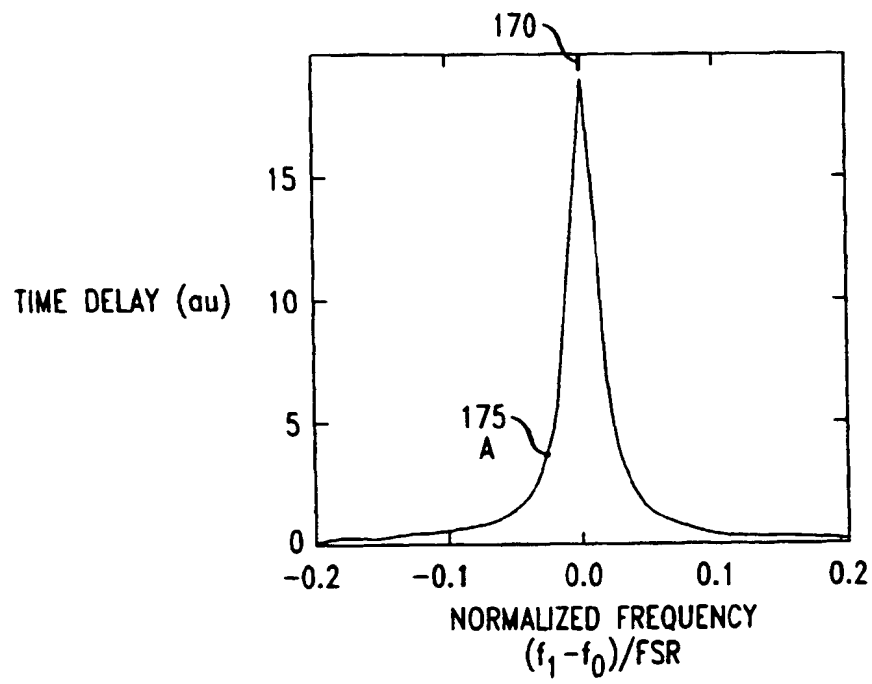


FIG. 6A

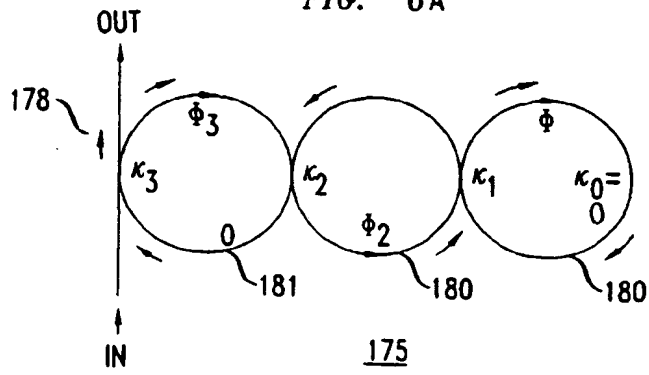


FIG. 6B

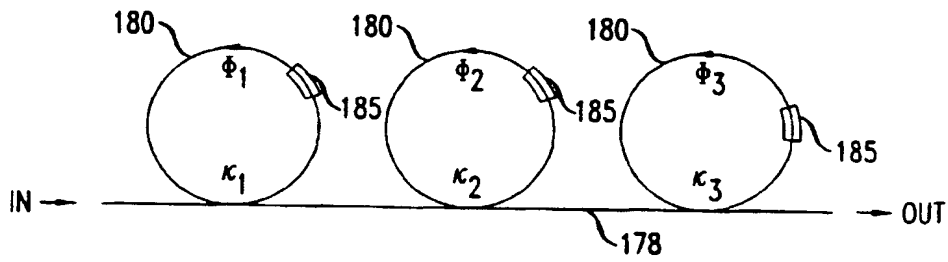


FIG. 7A

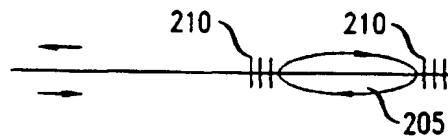


FIG. 7B

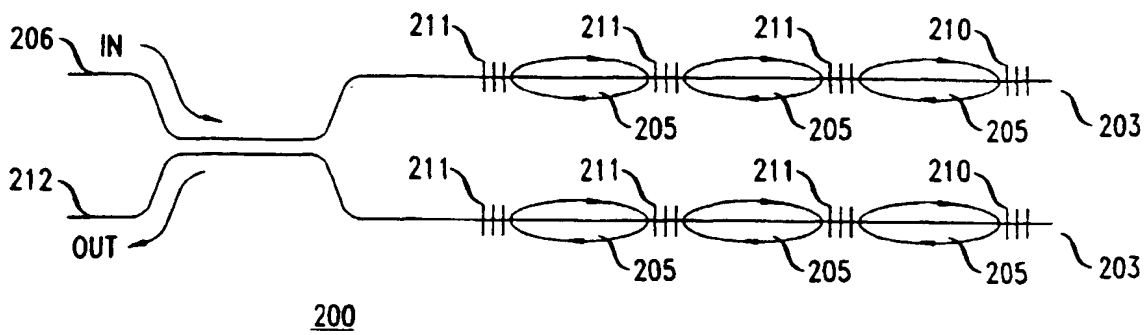


FIG. 8

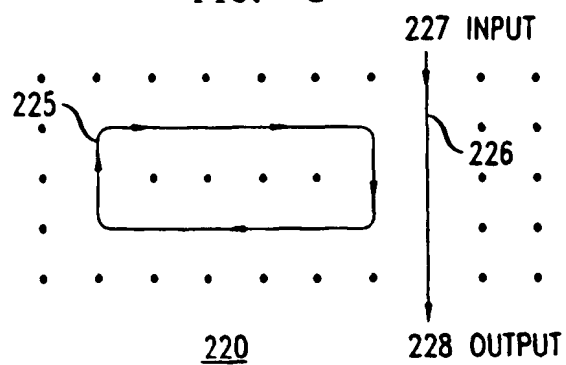


FIG. 9A

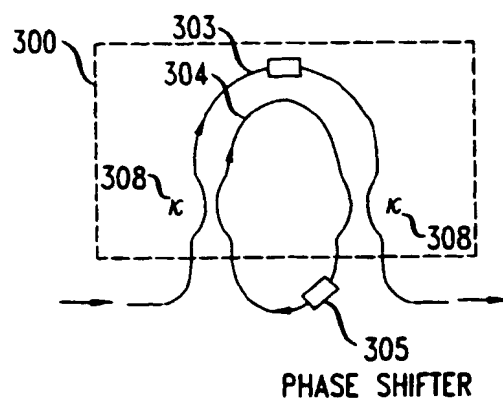


FIG. 9B

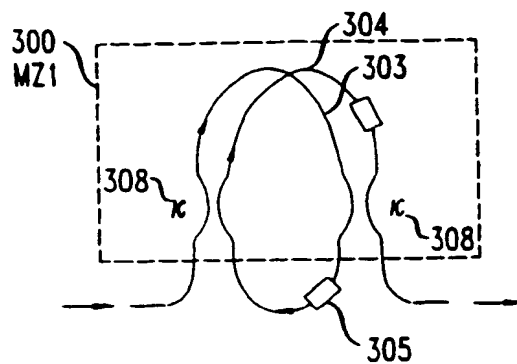


FIG. 10A

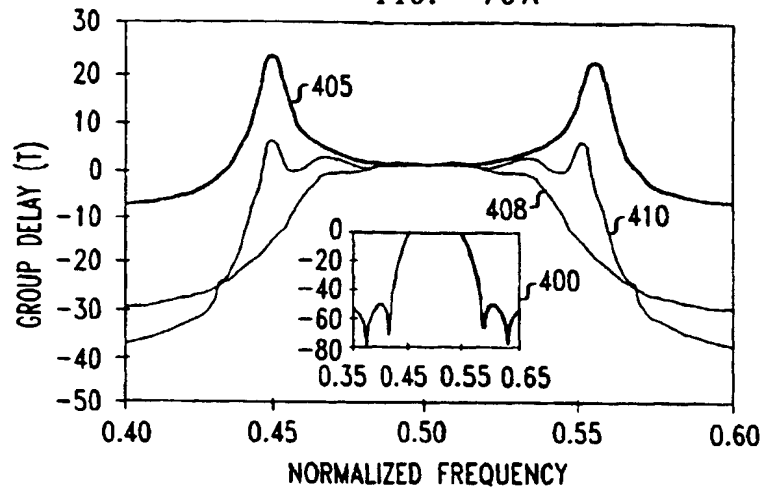


FIG. 10B

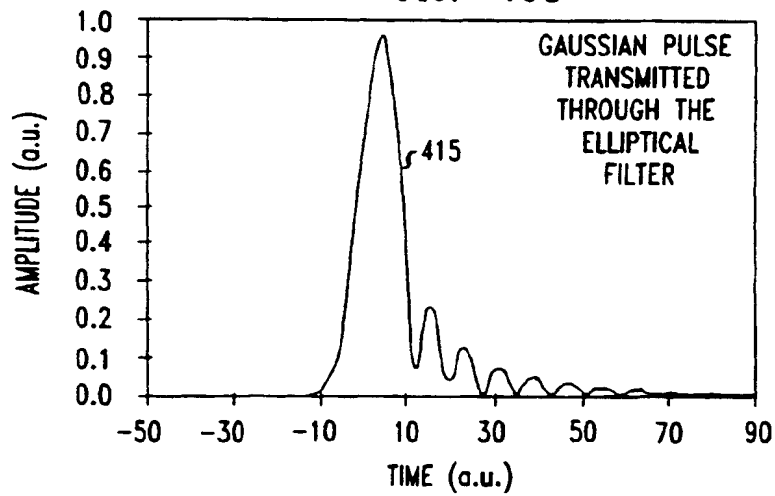


FIG. 10C

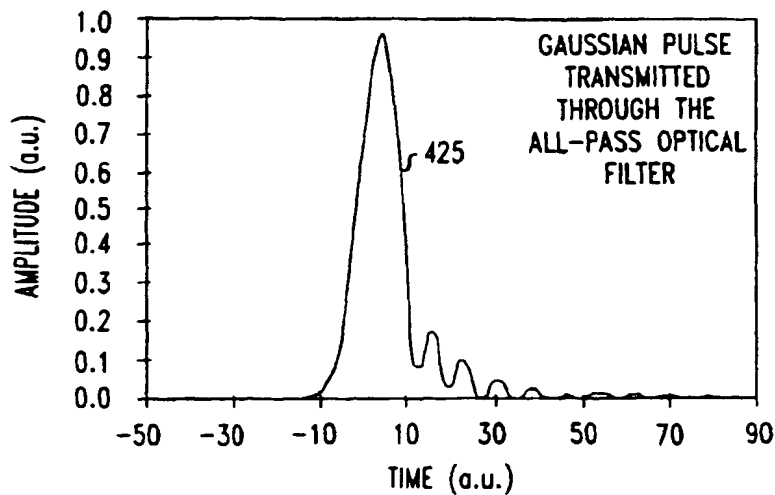


FIG. 11



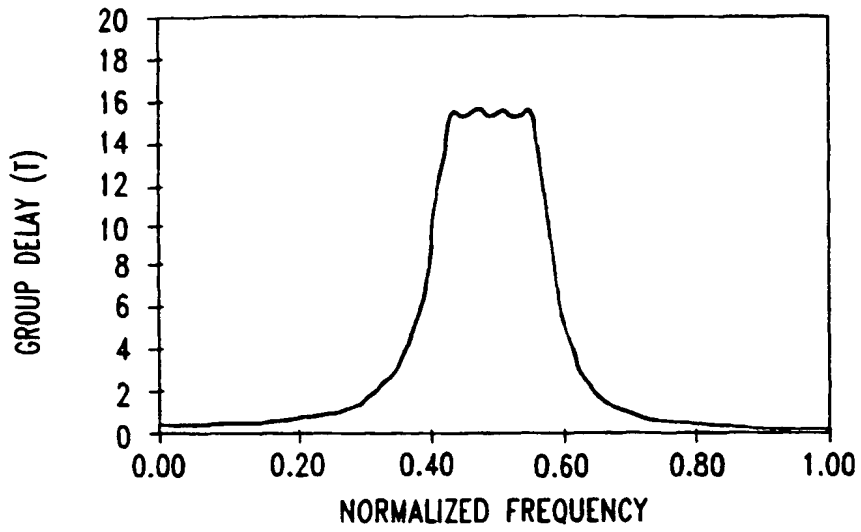


FIG. 12

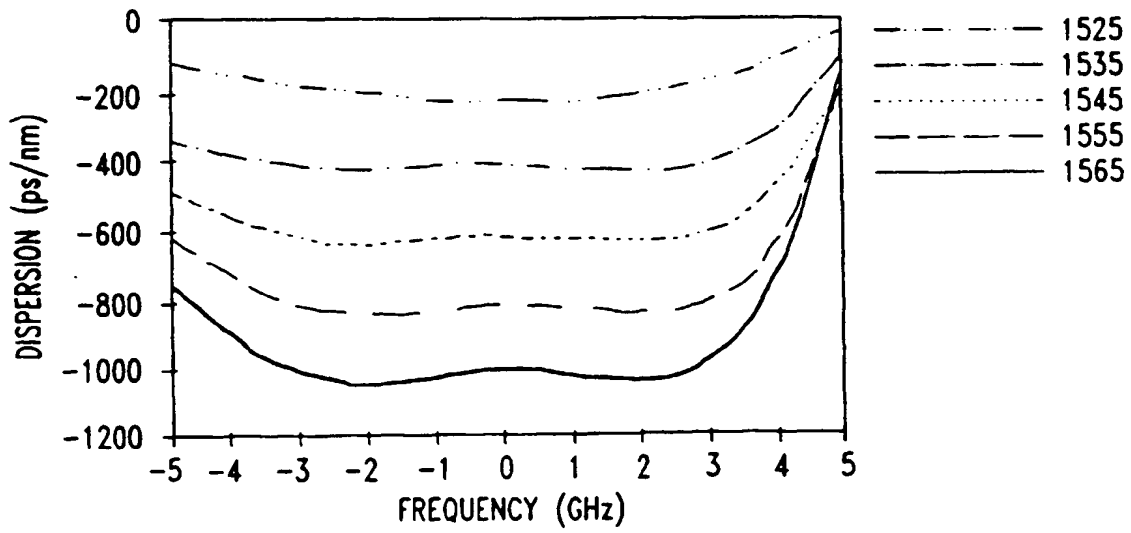

11



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 997 751 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
13.12.2000 Bulletin 2000/50

(51) Int. Cl.⁷: **G02B 6/293**, G02B 5/20,
H04B 10/18, H04L 25/03

(43) Date of publication A2:
03.05.2000 Bulletin 2000/18

(21) Application number: **99308189.2**

(22) Date of filing: **18.10.1999**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

- Lenz, Gadi
Fanwood, New Jersey 07023 (US)
- Madsen, Christi Kay
South Plainfield, New Jersey 07080 (US)
- Scotti, Ronald Edward
White House Station, New Jersey 08889 (US)

(30) Priority: **30.10.1998 US 182980**

(71) Applicant:
LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636 (US)


(74) Representative:
Johnston, Kenneth Graham et al
Lucent Technologies (UK) Ltd,
5 Mornington Road
Woodford Green Essex, IG8 OTU (GB)

(72) Inventors:
• Kazarinov, Rudolf Feodor
Bethlehem, Pennsylvania 18017 (US)

(54) **All-pass optical filter**

(57) An all-pass optical filter which reduces the dispersion of optical pulses transmitted therethrough is disclosed. The all-pass optical filter (130) reduces the dispersion of optical pulses by applying a desired phase response to optical pulses transmitted therethrough. The all-pass optical filter also has a frequency independent amplitude response. The all-pass optical filter has a structure which includes at least one feedback path (145), a splitter/combiner (143), an input port (140), and an output port (150).

FIG. 4 A

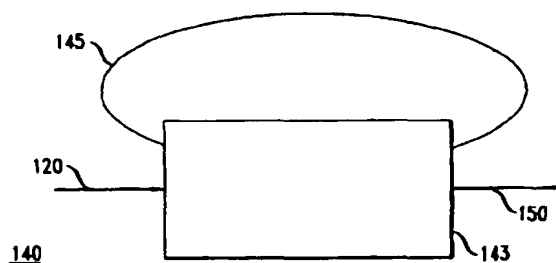

EP 0 997 751 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 8189

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	CIMINI L J ET AL: "OPTICAL EQUALIZATION TO COMBAT THE EFFECTS OF LASER CHIRP AND FIBERDISPERSION" JOURNAL OF LIGHTWAVE TECHNOLOGY, US, IEEE. NEW YORK, vol. 8, no. 5, 1 May 1990 (1990-05-01), pages 649-659, XP000125357 ISSN: 0733-8724 * the whole document *	1-4,7	G02B6/293 G02B5/20 H04B10/18 H04L25/03
X	EP 0 426 357 A (AMERICAN TELEPHONE & TELEGRAPH) 8 May 1991 (1991-05-08) * page 3, line 22 - line 57 * * page 4, line 1 - line 57 * * page 5, line 1 - line 27 * * claims; figures 1,2 *	1-4,7	
X	US 5 557 468 A (IP JOSEPH) 17 September 1996 (1996-09-17) * figures 1-7 * * column 1, line 51 - line 67 * * column 2, line 1 - line 63 * * column 3, line 35 - line 67 * * column 4, line 1 - line 67 * * column 5, line 1 - line 58 *	1-4,7,8	TECHNICAL FIELDS SEARCHED (Int.Cl.7) G02B H04B H04L
X,P	US 5 838 851 A (WISSEMAN PHILIP HENRY ET AL) 17 November 1998 (1998-11-17) * column 2, line 55 - line 67 * * column 3 - column 5 * * column 6, line 1 - line 23 * * figures *	1-4,7	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 9 October 2000	Examiner Mathyssek, K
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (P4/C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 8189

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X,D	MADSEN C K ET AL: "OPTICAL ALL-PASS FILTERS FOR PHASE RESPONSE DESIGN WITH APPLICATIONS FOR DISPERSION COMPENSATION" IEEE PHOTONICS TECHNOLOGY LETTERS,US,IEEE INC. NEW YORK, vol. 10, no. 7, 1 July 1998 (1998-07-01), pages 994-996, XP000771736 ISSN: 1041-1135 * the whole document *	1-4,7	
A	MADSEN C K: "EFFICIENT ARCHITECTURES FOR EXACTLY REALIZING OPTICAL FILTERS WITH OPTIMUM BANDPASS DESIGNS" IEEE PHOTONICS TECHNOLOGY LETTERS,US,IEEE INC. NEW YORK, vol. 10, no. 8, 1 August 1998 (1998-08-01), pages 1136-1138, XP000769880 ISSN: 1041-1135 * the whole document *	1,5	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 9 October 2000	Examiner Mathyssek, K
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 8189

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-10-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0426357 A	08-05-1991	US 5023947 A	11-06-1991
		CA 2026309 A,C	02-05-1991
		DE 69026465 D	15-05-1996
		DE 69026465 T	08-08-1996
		JP 2509749 B	26-06-1996
		JP 3169131 A	22-07-1991
US 5557468 A	17-09-1996	AU 5263296 A	23-10-1996
		JP 11511862 T	12-10-1999
US 5838851 A	17-11-1998	US 5903691 A	11-05-1999
		US 5896476 A	20-04-1999
		US 5892869 A	06-04-1999

EPO FORM P0659

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82